


Lubricator Series UL


ANSSION
PNEUMATIC & HYDRAULIC

◆ How to Order

UL - 02 N B



Symbol



Nil	Without bracket
B	With bracket

Thread

Nil	G	N	NPT
-----	---	---	-----

Port size

02	1/4	06	3/4
03	3/8	08	1
04	1/2		


Lubricator

◆ Specifications


Model	UL-02	UL-03	UL-04	UL-06	UL-08
Port size	1/4	3/8	1/2	3/4	1
Fluid	Air				
Body material	Aluminum die-cast				
Bowl material	Polycarbonate				
Set pressure range	0.05~0.99 MPa				
Max. Inlet pressure(standard)	1.2 MPa				
Max. flow rate	2490	2525	4310	8400	9000
Ambient and fluid temperature	-10°C~60°C(No freezing)				
Recommended lubricant	Turbin oil class 1(ISO VG32)				
Lubricator bowl capacity	125cc		235cc		
Net wieght	500g		1095g		

◆ Dimensions

UL-02,03,04

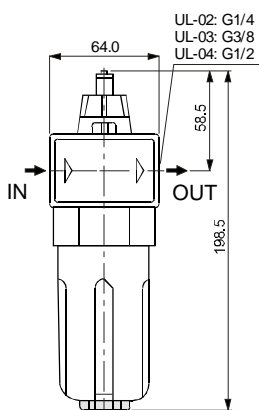

UL-06,08

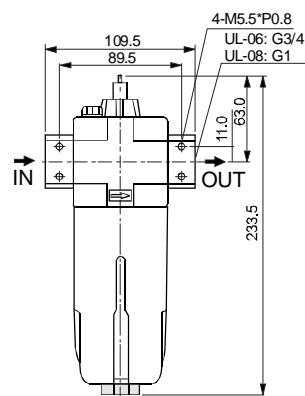

III

AD401,402

AC

AW

AF

AR

AL

UFRL

UFR/L

UFR

UF

UR

UL

FRL700A

FRL600A

FR500A

F200A

NR200

R 200

L200A

AAC,ABC

AAF,ABFC

AAFR,ABFR

AAF,ABF

AAR,ABR

AAL,ABL

SFC

SFR

SL